






# MTD8M

# BELT DATA

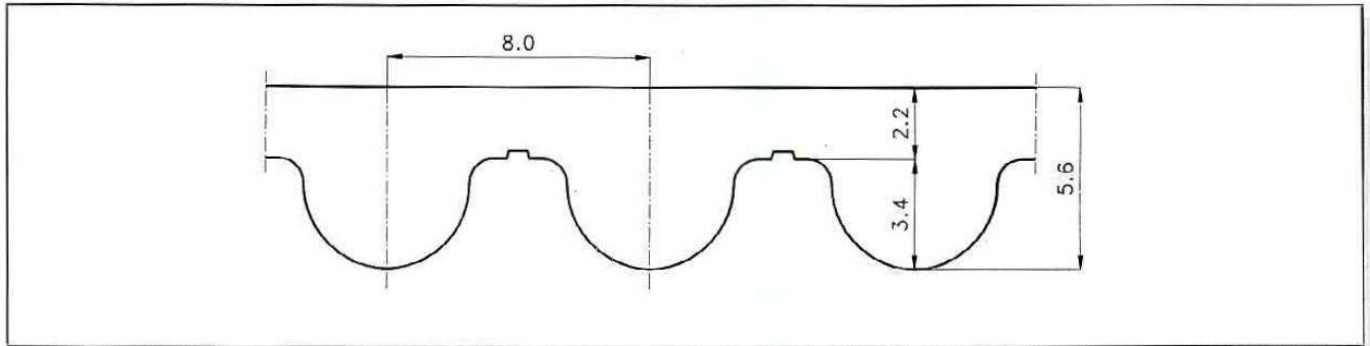

| WIDTH [mm] | MAX TRACTION LOAD [N] | MAX TRACTION LOAD JOINED [N] | BREAKING STRENGTH [N] |
|------------|-----------------------|------------------------------|-----------------------|
| 10         | 1220                  | 610                          | 4150                  |
| 15         | 1950                  | 975                          | 6640                  |
| 20         | 2920                  | 1460                         | 9960                  |
| 30         | 4390                  | 2195                         | 14940                 |
| 50         | 8050                  | 4025                         | 27400                 |
| 85         | 13900                 | 6950                         | 47320                 |
| 100        | 16600                 | 8300                         | 56500                 |

|    |                   |
|----|-------------------|
| LL | - OPEN END BELT - |
| J  | - JOINED BELT -   |

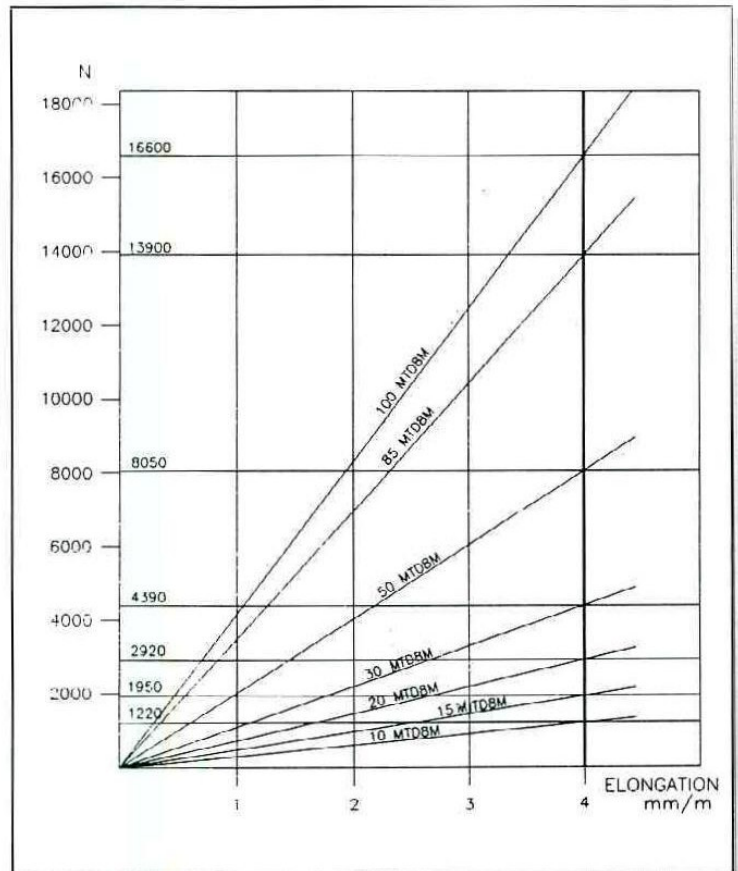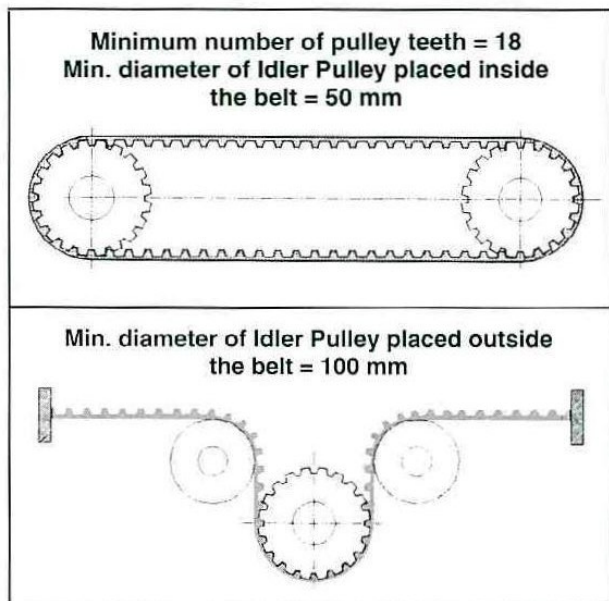

| BELT CODE |      |           |
|-----------|------|-----------|
| Width     | Type | Length    |
| 30        | 8M   | 100 m-LL  |
| 50        | 8M   | 4496 mm-J |

| ROLLS STANDARD LENGTH |                    |
|-----------------------|--------------------|
| 10                    | 15 20 30 50 85 100 |
| 50 m                  | 100 m              |

| MINIMUM LENGTH JOINED BELT |
|----------------------------|
| For all widths             |
| 900 mm                     |